

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/112972 A1

(51) International Patent Classification⁷: B05B 13/06,
3/10, F16L 55/1645

(74) Agent: BAILEY WALSH & CO LLP; 5 York Place,
Leeds LS1 2SD (GB).

(21) International Application Number:
PCT/GB2004/002513

(22) International Filing Date: 14 June 2004 (14.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0313883.1 16 June 2003 (16.06.2003) GB

(71) Applicant (for all designated States except US): HUNT-
ING INDUSTRIAL COATINGS LTD [GB/GB]; Derby
Road, Widnes, Cheshire WA8 9ND (GB).

(72) Inventor; and


(75) Inventor/Applicant (for US only): WHITTLE, Neil
[GB/GB]; Hunting Industrial Coatings Ltd, Derby Road,
Widnes, Cheshire WA8 9ND (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DISPENSING APPARATUS

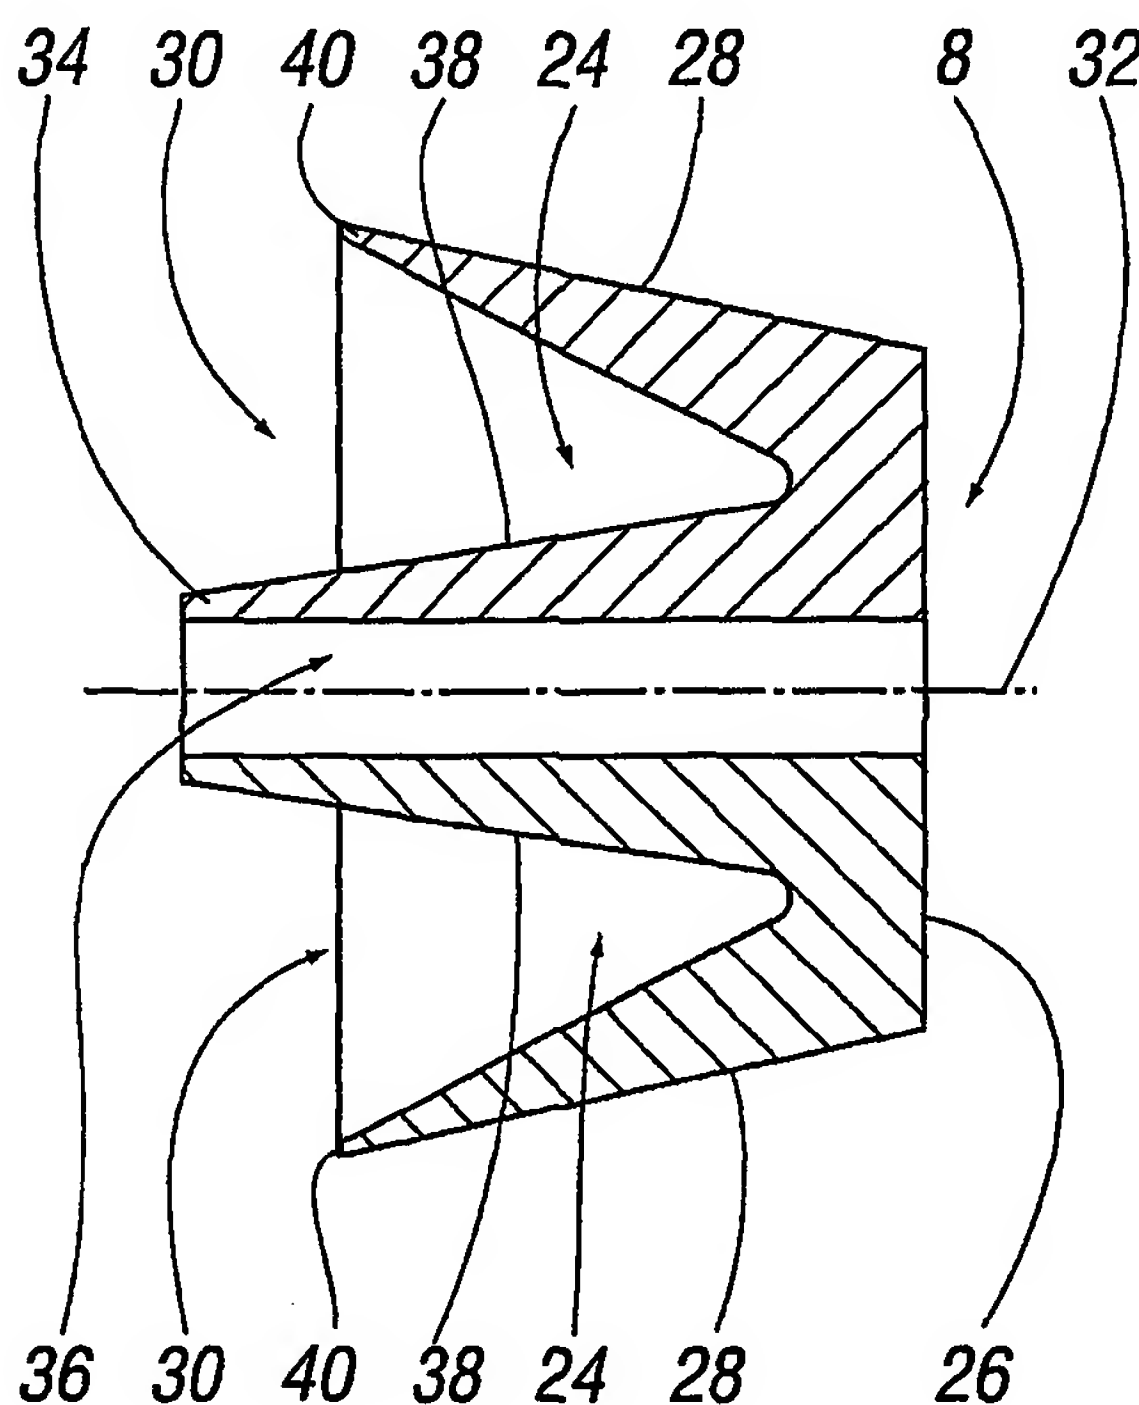

(57) Abstract: Dispensing apparatus (2) is provided
for use in dispensing a fluid lining material onto the in-
terior wall surfaces of a conduit. The dispensing appa-
ratus (2) includes at least one reservoir for the contain-
ment of at least one fluid, dispensing outlet means (6)
communicating with said at least one reservoir for dis-
pensing fluid therefrom and a rotational head member
for directing the dispensed fluid from said dispensing
outlet means in a required direction onto the walls of
the conduit. The rotational head member has an open-
ing which faces the remainder of the apparatus and said
head member is capable of undergoing reciprocal mo-
tion relative to a further part of the apparatus in use to
allow multiple layers of fluid lining to be provided in a
single pass of the apparatus through the conduit. A di-
rectional member is provided in the recess portion and
fluid dispensed from said dispensing outlet means im-
pacts initially with an outer surface of said directional
member prior to flowing out of said recess portion.

WO 2004/112972 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.